

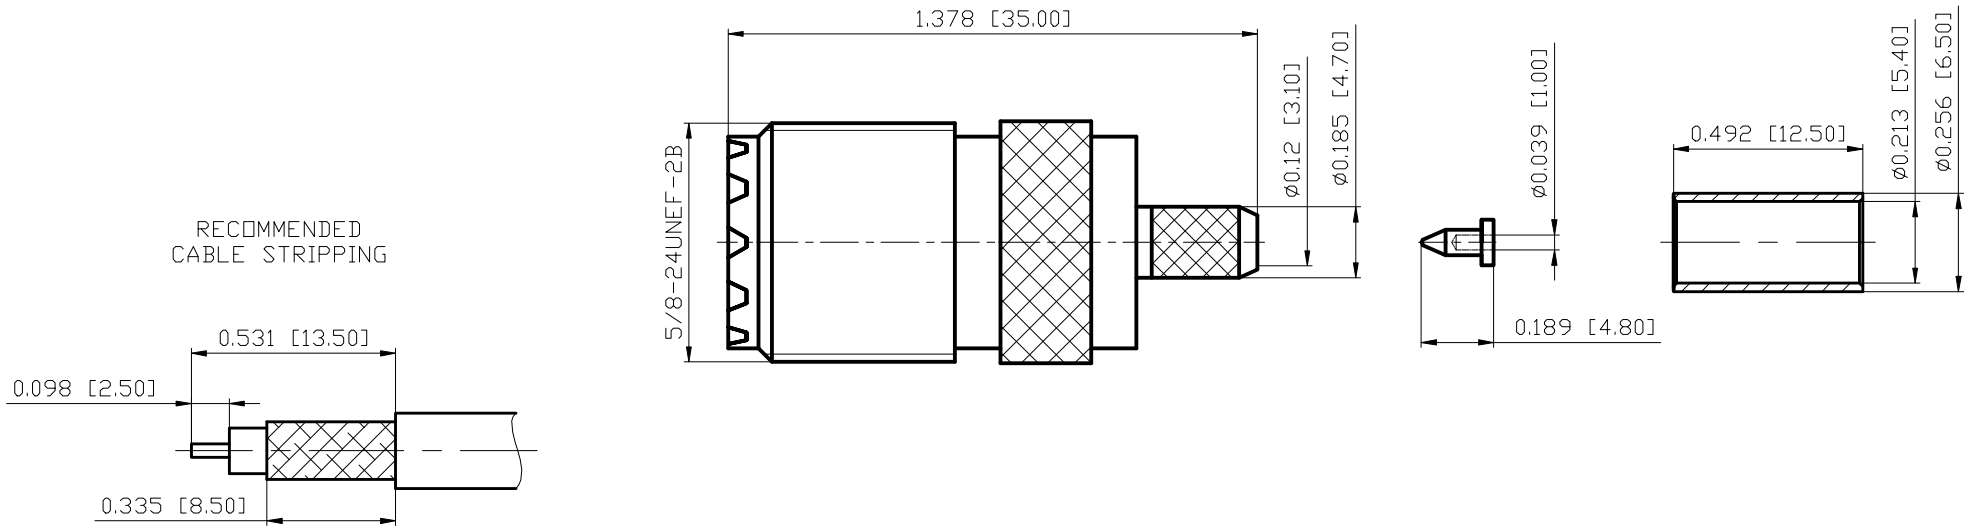



- NOTES:
- MATERIAL
BODY:BRASS;
CONTACT:BRONZE,MALE BRASS;
INSULATOR:PTFE;
 - PLATING
BODY:NICK PLATED;
CONTACT:SILVER PLATED;
 - UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE AFTER PLATING;
 - RoHS COMPLIANT
 - CHARACTERISTIC IMPEDANCE:50
 - FREQUENCY RANGE:0~3GHz
 - WORKING VOLTAGE:500VRMS
 - DIELECTRIC WITHSTANDING VOLTAGE:1500VRMS
 - VSWR:1.2MAX
 - INSULATOR RESISTANCE:5000 MEGOHMS MIN

660.870-RFX	REVISION/D				
DRAWING NO	REV	DESCRIPTION	DATE	CEO	APPR
THIRD ANGLE PROJ. 					

RECOMMENDED
FERRULE
CRIMP SIZE



RECOMMENDED
CABLE STRIPPING

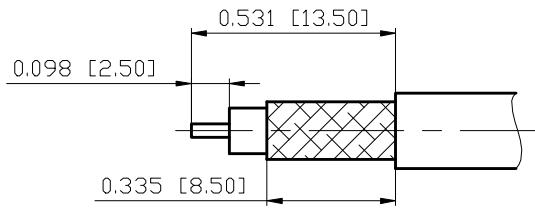

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM AND TOLERANCES ARE: 2 PLACE DESIMAL 3 PLACE DESIMAL ANGLES ± 2 ± 0.5 $\pm 1^\circ$	MATERIAL	DRAWN DATE William 09/11/09	TITLE UHF straight female crimp 50 ohm for RG58 or LMR195	EXCEL WIRELESS	
	REFERENCE	CHECKED DATE William 09/11/09			
			APPROVED DATE William 09/11/09	P/N: EXUHF-C-K5	SCALE : 2:1
				DRAWING NO 660.870-RFX	REV A